




DIVISIÓN NORTE
 UNIDAD OPERATIVA PERFORACIÓN VERACRUZ

ANEXO "D"


Propuesta de Programa de Perforación

Pozo Cameronero 101

Equipo PM-401

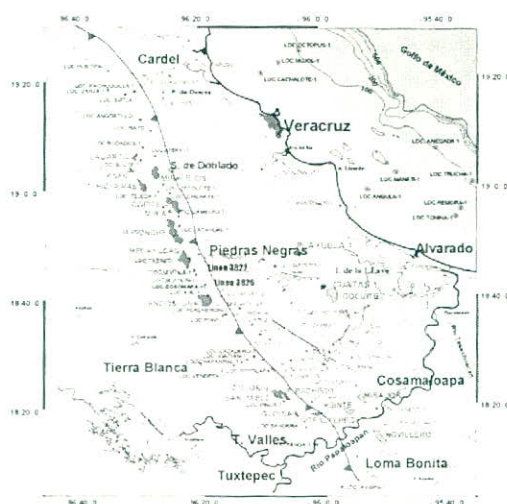

ANEXO D (Cameronero 101)
 ACUERDO (FUTURO CONTRATO DE SERVICIOS) No. A. EXPL. PAPALOAPAN, RN/PPMP- DN/004/00
 PEMEX PERFORACIÓN Y MANTO. DE POZOS
 DIVISION NORTE

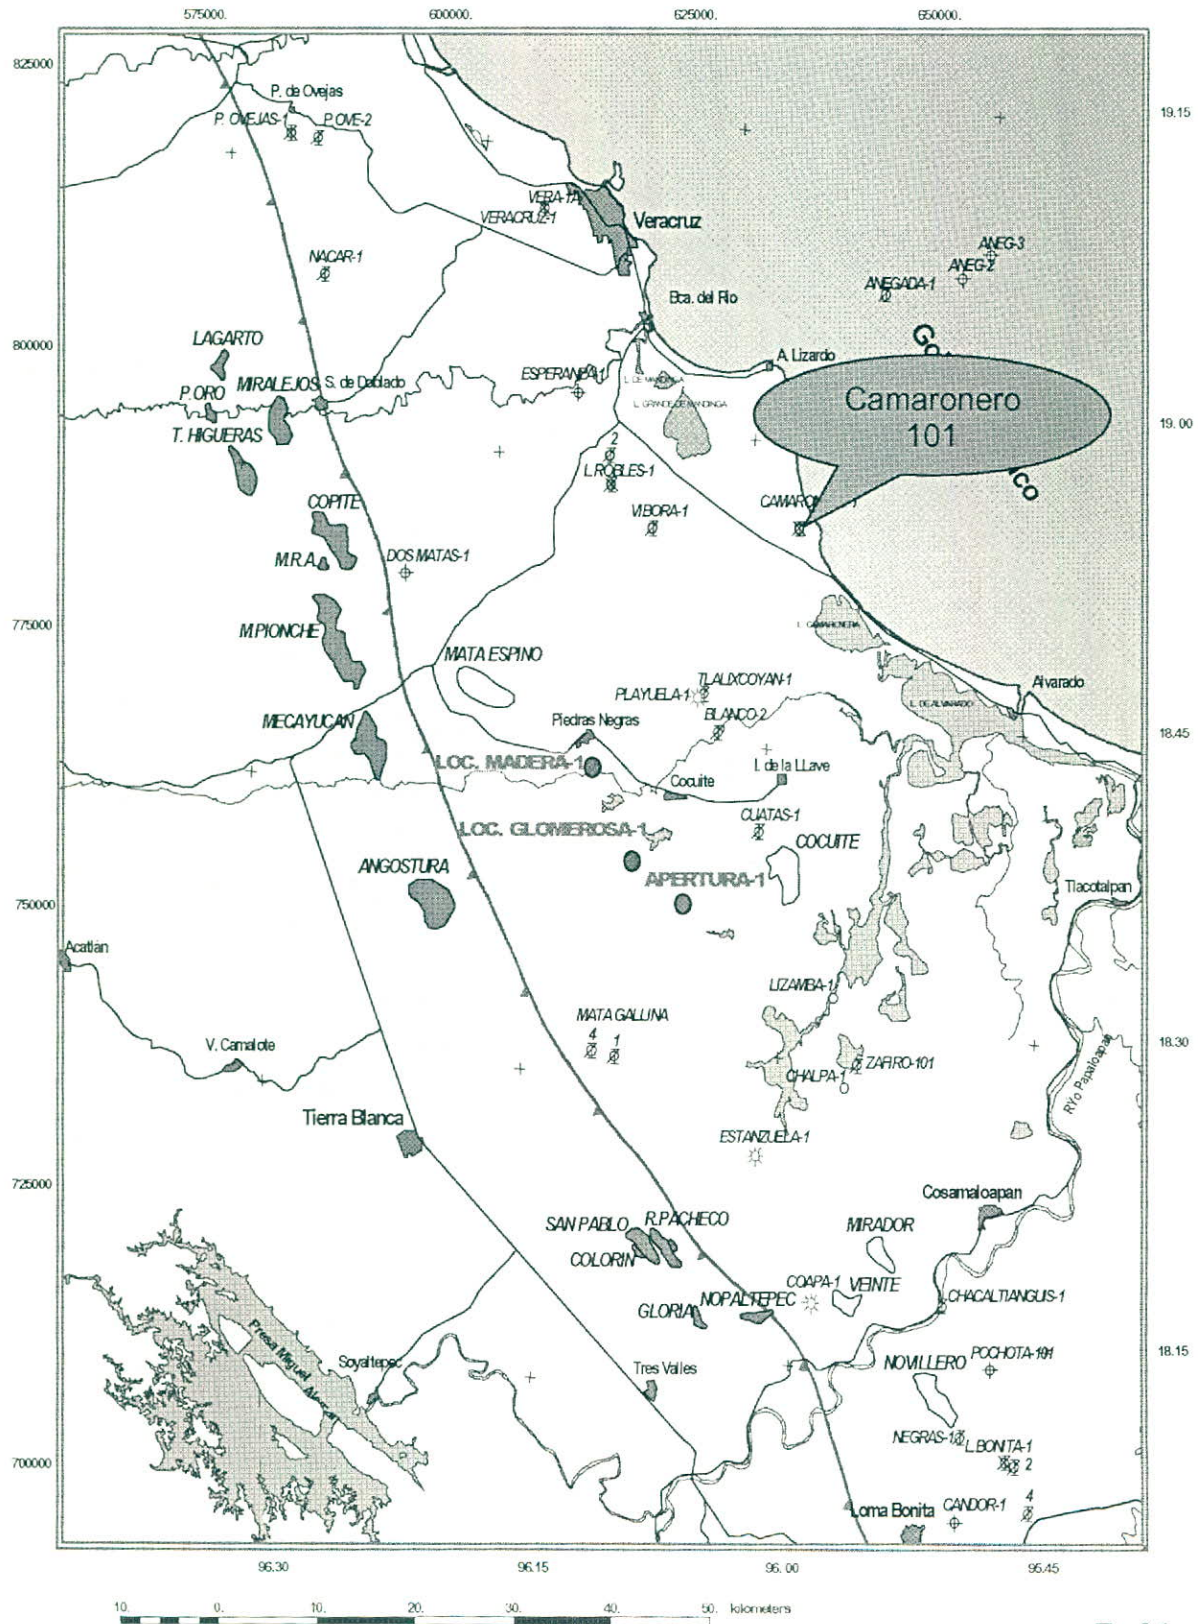


PROPUESTA DEL ESTADO MECÁNICO, DENSIDADES Y COLUMNA GEOLÓGICA ESPERADA


COLUMNA GEOLÓGICA
 DEL POZO DE
 CORRELACION

ESTADO MECÁNICO
 PROPUESTO POZO
 CAMARONERO 1

DENSIDADES

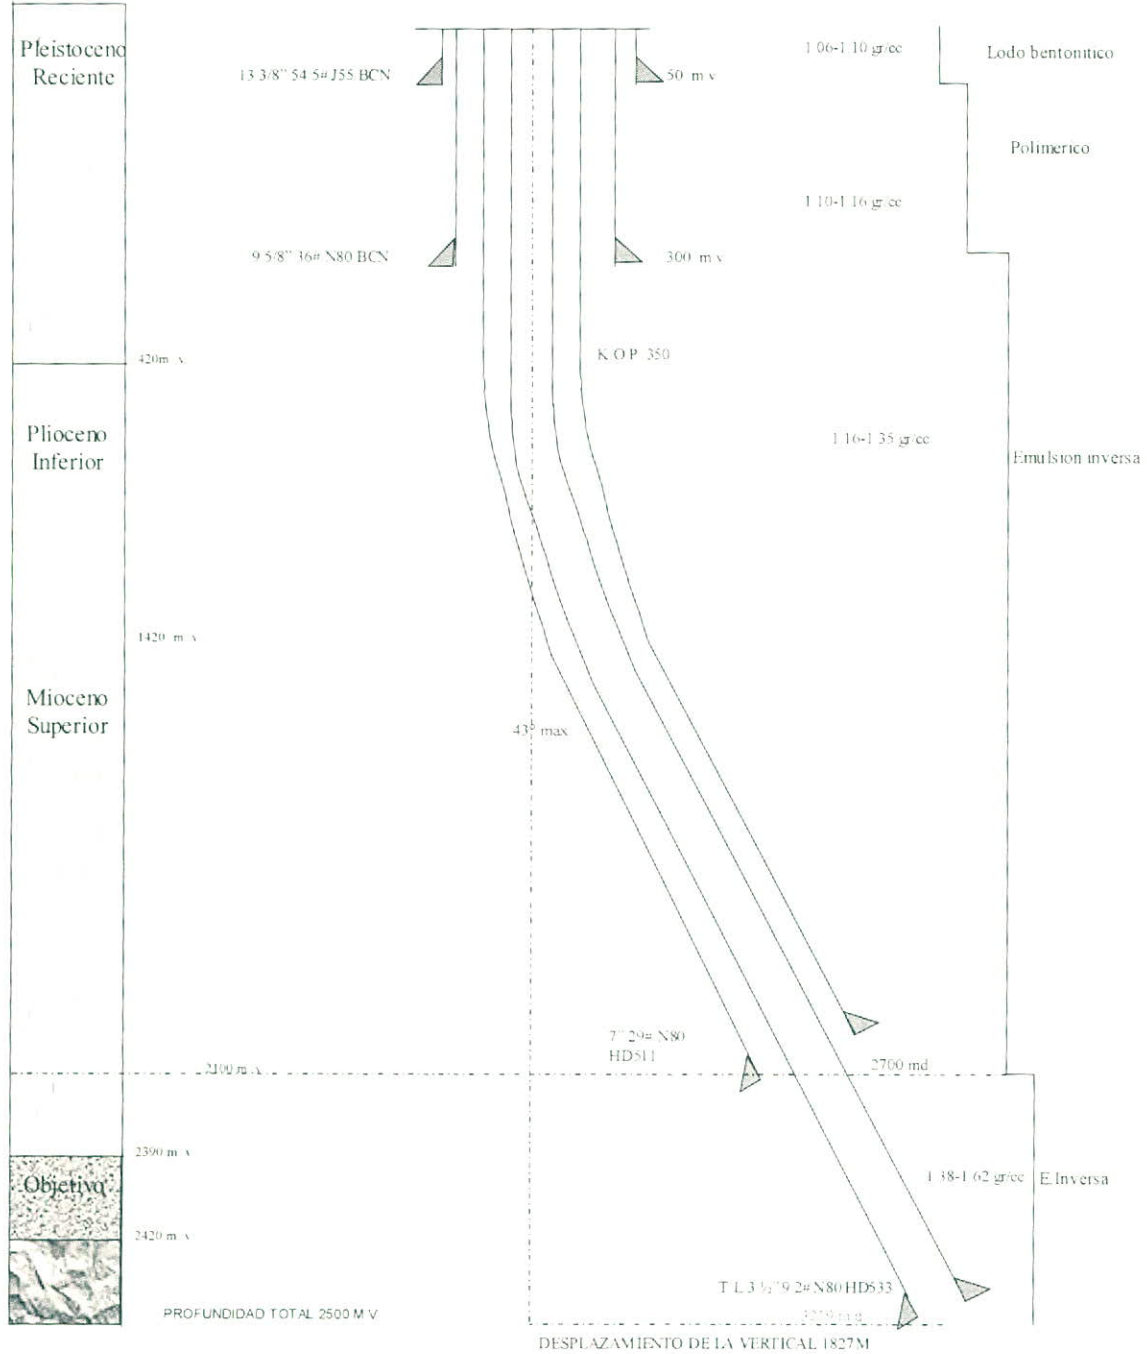

Programa Direccional

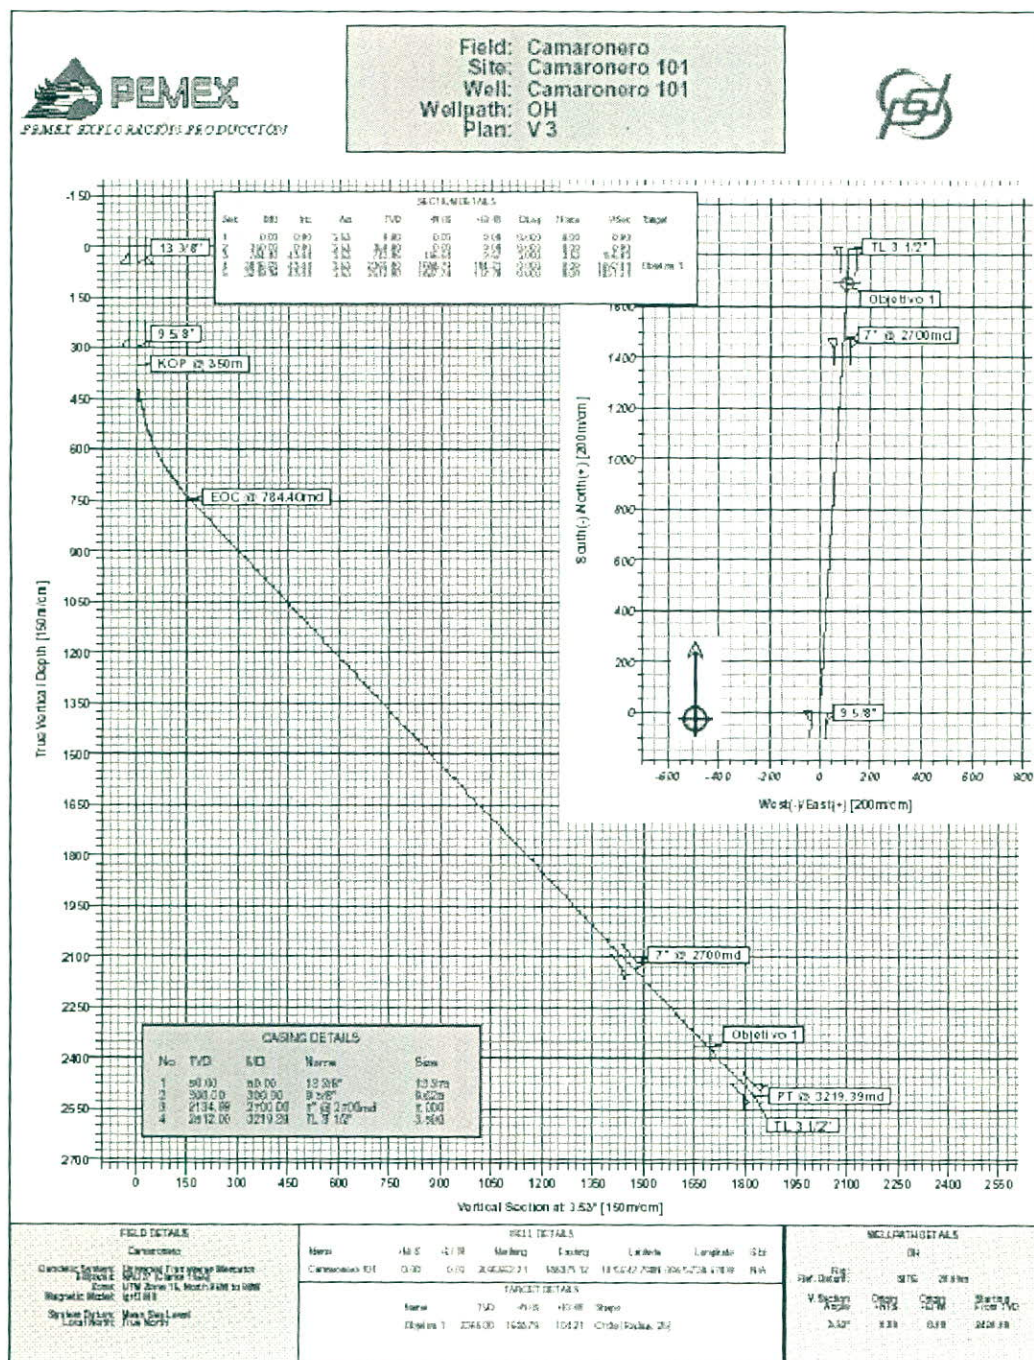

Precision Drilling Planning Report

Company: PEMEX EXPLORACION Y PRODUCCION Field: Camaronero Site: Camaronero 101 Well: Camaronero 101 Wellpath: OH				Date: 1/10/2003 Coordinate(NE) Reference: SITE Camaronero 101, True North Vertical (TVD) Reference: SITE 20.0 Section (VS) Reference: Well (0.00N,0.00E,2.53Ad) Plan: V 3				Page: 1		
Field: Camaronero										
Map System: Universal Transverse Mercator Geo Datum: NAD27 (Clarke 1866) Sys Datum: Mean Sea Level				Map Zone: UTM Zone 15, North 96W to 90W Coordinate System: Site Centre Geomagnetic Model: Igrf2000						
Site: Camaronero 101										
Site Position: Front Map: Position Uncertainty: Ground Level:				Northing: 2095562.21 m Eastng: 188371.12 m		Latitude: 18 55 47.798 N Longitude: 95 57 30.678 W North Reference: True Grid Convergence: -0.96 deg				
Well: Camaronero 101				Sht Name:						
Well Position: +N-S 0.00 m Position Uncertainty: +E-W 0.00 m 0.00 m				Northing: 2095562.21 m Eastng: 188371.12 m		Latitude: 18 55 47.798 N Longitude: 95 57 30.678 W				
Wellpath: OH				Drilled From: Surface Tic-on Depth: 0.00 m Above System Datum: Mean Sea Level Declination: 5.01 deg Mag Dip Angle: 47.56 deg		Current Datum: SITE Magnetic Data: 01/09/2003 Field Strength: 41678 nT Vertical Section: Depth From (TVD) m 2420.00		Height: 20.00 m +N-S: 0.00 m +E-W: 0.00 m Direction: 3.53		
Plan: V 3				Date Composed: 01/09/2003 Version: 1 Hed-In: From Surface						
Principal: No										
Plan Section Information										
MD m	Incl deg	Azim deg	TVD m	+N-S m	+E-W m	DLS deg/30m	Build deg/30m	Turn deg/30m	TFO deg	Target
0.00	0.00	3.53	0.00	0.00	0.00	0.000	0.000	0.000	0.00	
350.00	0.00	3.53	350.00	0.00	0.00	0.000	0.000	0.000	0.00	
784.40	43.44	3.53	743.96	156.64	9.67	0.000	3.000	0.000	3.53	
3016.93	43.44	3.53	2365.00	1688.79	104.21	0.000	0.000	0.000	0.00	Objective 1
3219.39	43.44	3.53	2512.00	1827.74	112.78	0.000	0.000	0.000	0.00	
Survey										
MD m	Incl deg	Azim deg	TVD m	+N-S m	+E-W m	VS m	DLS deg/30m	Build deg/30m	Turn deg/30m	Tool/Comment
0.00	0.00	3.53	0.00	0.00	0.00	0.00	0.000	0.000	0.000	
30.00	0.00	3.53	30.00	0.00	0.00	0.00	0.000	0.000	0.000	MWD
50.00	0.00	3.53	50.00	0.00	0.00	0.00	0.000	0.000	0.000	13 3/8"
60.00	0.00	3.53	60.00	0.00	0.00	0.00	0.000	0.000	0.000	MWD
90.00	0.00	3.53	90.00	0.00	0.00	0.00	0.000	0.000	0.000	MWD
120.00	0.00	3.53	120.00	0.00	0.00	0.00	0.000	0.000	0.000	MWD
150.00	0.00	3.53	150.00	0.00	0.00	0.00	0.000	0.000	0.000	MWD
180.00	0.00	3.53	180.00	0.00	0.00	0.00	0.000	0.000	0.000	MWD
210.00	0.00	3.53	210.00	0.00	0.00	0.00	0.000	0.000	0.000	MWD
240.00	0.00	3.53	240.00	0.00	0.00	0.00	0.000	0.000	0.000	MWD
270.00	0.00	3.53	270.00	0.00	0.00	0.00	0.000	0.000	0.000	MWD
300.00	0.00	3.53	300.00	0.00	0.00	0.00	0.000	0.000	0.000	9 5/8"
330.00	0.00	3.53	330.00	0.00	0.00	0.00	0.000	0.000	0.000	MWD
350.00	0.00	3.53	350.00	0.00	0.00	0.00	0.000	0.000	0.000	MWD
360.00	1.00	3.53	360.00	0.						

Precision Drilling Planning Report

Company: PEMEX EXPLORACION Y PRODUCCION			Date: 11/08/2003		Time: 20:09:58		Page: 2				
Field: Camaronero			Coordinate(N/E) Reference: Site: Camaronero 101, True North								
Site: Camaronero 101			Vertical (TVD) Reference: SITE 20.0								
Well: Camaronero 101			Section (VS) Reference: Well(0.00N,0.00E,3.53A.g)								
Wellpath: CH			Plan: V3								
Survey											
MD m	Incl deg	Azin deg	TVD m	+N-S m	+E-W m	VS m	DLS deg/30m	Build deg/30m	Turn deg/30m	Tool/Comment	
420.00	7.00	3.53	418.83	4.26	0.26	4.27	3.000	3.000	0.000	MWD	
450.00	10.00	3.53	449.49	5.69	0.54	8.70	3.000	3.000	0.000	MWD	
480.00	13.00	3.53	478.89	14.66	0.90	14.68	3.000	3.000	0.000	MWD	
510.00	16.00	3.53	507.50	22.15	1.37	22.20	3.000	3.000	0.000	MWD	
540.00	19.00	3.53	536.54	31.16	1.82	31.22	3.000	3.000	0.000	MWD	
570.00	22.00	3.53	564.63	41.64	2.57	41.72	3.000	3.000	0.000	MWD	
600.00	25.00	3.53	592.14	53.58	3.31	53.68	3.000	3.000	0.000	MWD	
630.00	28.00	3.53	618.99	66.94	4.13	67.07	3.000	3.000	0.000	MWD	
660.00	31.00	3.53	645.10	81.68	5.04	81.84	3.000	3.000	0.000	MWD	
690.00	34.00	3.53	670.39	97.77	6.03	97.95	3.000	3.000	0.000	MWD	
720.00	37.00	3.53	694.81	115.15	7.11	115.37	3.000	3.000	0.000	MWD	
750.00	40.00	3.53	718.29	133.79	8.26	134.05	3.000	3.000	0.000	MWD	
780.00	43.00	3.53	740.76	153.63	9.48	153.92	3.000	3.000	0.000	MWD	
794.40	43.44	3.53	743.96	156.84	9.67	156.93	3.000	3.000	0.000	MWD	
810.00	43.44	3.53	762.55	174.21	10.75	174.54	0.000	0.000	0.000	MWD	
840.00	43.44	3.53	784.33	194.80	12.02	195.17	0.000	0.000	0.000	MWD	
870.00	43.44	3.53	806.12	215.38	13.29	215.79	0.000	0.000	0.000	MWD	
900.00	43.44	3.53	827.90	235.97	14.56	236.42	0.000	0.000	0.000	MWD	
930.00	43.44	3.53	849.68	256.56	15.83	257.05	0.000	0.000	0.000	MWD	
960.00	43.44	3.53	871.47	277.15	17.10	277.68	0.000	0.000	0.000	MWD	
990.00	43.44	3.53	893.25	297.74	18.37	298.30	0.000	0.000	0.000	MWD	
1020.00	43.44	3.53	915.03	318.33	19.64	318.93	0.000	0.000	0.000	MWD	
1050.00	43.44	3.53	936.81	338.92	20.91	339.56	0.000	0.000	0.000	MWD	
1080.00	43.44	3.53	958.60	359.50	22.18	360.19	0.000	0.000	0.000	MWD	
1110.00	43.44	3.53	980.38	380.09	23.45	380.82	0.000	0.000	0.000	MWD	
1140.00	43.44	3.53	1002.16	400.68	24.72	401.44	0.000	0.000	0.000	MWD	
1170.00	43.44	3.53	1023.95	421.27	25.99	422.07	0.000	0.000	0.000	MWD	
1200.00	43.44	3.53	1045.73	441.86	27.27	442.70	0.000	0.000	0.000	MWD	
1230.00	43.44	3.53	1067.51	462.45	28.54	463.33	0.000	0.000	0.000	MWD	
1260.00	43.44	3.53	1089.29	483.04	29.81	483.95	0.000	0.000	0.000	MWD	
1290.00	43.44	3.53	1111.08	503.62	31.08	504.58	0.000	0.000	0.000	MWD	
1320.00	43.44	3.53	1132.86	524.21	32.35	525.21	0.000	0.000	0.000	MWD	
1350.00	43.44	3.53	1154.64	544.80	33.62	545.84	0.000	0.000	0.000	MWD	
1380.00	43.44	3.53	1176.43	565.39	34.89	566.47	0.000	0.000	0.000	MWD	
1410.00	43.44	3.53	1198.21	585.98	36.16	587.09	0.000	0.000	0.000	MWD	
1440.00	43.44	3.53	1219.99	606.57	37.43	607.72	0.000	0.000	0.000	MWD	
1470.00	43.44	3.53	1241.78	627.16	38.70	628.35	0.000	0.000	0.000	MWD	
1500.00	43.44	3.53	1263.56	647.74	39.97	648.98	0.000	0.000	0.000	MWD	
1530.00	43.44	3.53	1285.34	668.33	41.24	669.60	0.000	0.000	0.000	MWD	
1560.00	43.44	3.53	1307.12	688.92	42.51	690.23	0.000	0.000	0.000	MWD	
1590.00	43.44	3.53	1328.91	709.51	43.78	710.86	0.000	0.000	0.000	MWD	
1620.00	43.44	3.53	1350.69	730.10	45.05	731.49	0.000	0.000	0.000	MWD	
1650.00	43.44	3.53	1372.47	750.69	46.32	752.12	0.000	0.000	0.000	MWD	
1680.00	43.44	3.53	1394.26	771.28	47.59	772.74	0.000	0.000	0.000	MWD	
1710.00	43.44	3.53	1416.04	791.86	48.86	793.37	0.000	0.000	0.000	MWD	
1740.00	43.44	3.53	1437.82	812.45	50.13	814.00	0.000	0.000	0.000	MWD	
1770.00	43.44	3.53	1459.60	833.04	51.40	834.63	0.000	0.000	0.000	MWD	
1800.00	43.44	3.53	1481.39	853.63	52.67	855.25	0.000	0.000	0.000	MWD	
1830.00	43.44	3.53	1503.17	874.22	53.94	875.88	0.000	0.000	0.000	MWD	
1860.00	43.44	3.53	1524.95	894.81	55.21	896.51	0.000	0.000	0.000	MWD	
1890.00	43.44	3.53	1546.74	915.40	56.49	917.14	0.000	0.000	0.000	MWD	
1920.00	43.44	3.53	1568.52	935.98	57.76	937.77	0.000	0.000	0.000	MWD	
1950.00	43.44	3.53	1590.30	956.57	59.03	958.39	0.000	0.000	0.000	MWD	
1980.00	43.44	3.53	1612.09	977.16	60.30	979.02	0.000	0.000	0.000	MWD	

Precision Drilling Planning Report

Company: PEMEX EXPLORACION Y PRODUCCION				Date: 11/09/2003	Time: 20:09:06	Page: 3					
Field: Camaronero				Coordinate(N/E) Reference: Site: Camaronero 101, True North							
Site: Camaronero 101				Vertical (TVD) Reference: SITE 20.0							
Well: Camaronero 101				Section (NS) Reference: Well (0.00N,0.00E,3.53As)							
Wellpath: OH				Plan: V.3							
Survey											
MD m	Incl deg	Azth deg	TVD m	+N/-S m	+E/-W m	VS m	DLS deg/30m	Build deg/30m	Turn deg/30m	Tool/Comment	
2010.00	43.44	3.53	1633.87	997.75	61.57	899.65	0.000	0.000	0.000	MWD	
2040.00	43.44	3.53	1655.65	1015.34	62.54	1020.28	0.000	0.000	0.000	MWD	
2070.00	43.44	3.53	1677.43	1038.03	64.11	1040.90	0.000	0.000	0.000	MWD	
2100.00	43.44	3.53	1699.22	1059.52	65.38	1061.53	0.000	0.000	0.000	MWD	
2130.00	43.44	3.53	1721.00	1080.10	66.65	1082.16	0.000	0.000	0.000	MWD	
2160.00	43.44	3.53	1742.78	1100.69	67.92	1102.79	0.000	0.000	0.000	MWD	
2190.00	43.44	3.53	1764.57	1121.28	69.19	1123.41	0.000	0.000	0.000	MWD	
2220.00	43.44	3.53	1786.35	1141.87	70.46	1144.04	0.000	0.000	0.000	MWD	
2250.00	43.44	3.53	1808.13	1162.46	71.73	1164.67	0.000	0.000	0.000	MWD	
2280.00	43.44	3.53	1829.91	1183.05	73.00	1185.30	0.000	0.000	0.000	MWD	
2310.00	43.44	3.53	1851.70	1203.64	74.27	1205.93	0.000	0.000	0.000	MWD	
2340.00	43.44	3.53	1873.48	1224.23	75.54	1226.56	0.000	0.000	0.000	MWD	
2370.00	43.44	3.53	1895.26	1244.81	76.81	1247.18	0.000	0.000	0.000	MWD	
2400.00	43.44	3.53	1917.05	1265.40	78.08	1267.81	0.000	0.000	0.000	MWD	
2430.00	43.44	3.53	1938.83	1285.99	79.35	1288.44	0.000	0.000	0.000	MWD	
2460.00	43.44	3.53	1960.61	1306.58	80.62	1309.06	0.000	0.000	0.000	MWD	
2490.00	43.44	3.53	1982.39	1327.17	81.89	1329.69	0.000	0.000	0.000	MWD	
2520.00	43.44	3.53	2004.18	1347.76	83.16	1350.32	0.000	0.000	0.000	MWD	
2550.00	43.44	3.53	2025.96	1368.35	84.43	1370.95	0.000	0.000	0.000	MWD	
2580.00	43.44	3.53	2047.74	1388.93	85.71	1391.58	0.000	0.000	0.000	MWD	
2610.00	43.44	3.53	2069.53	1409.52	86.98	1412.20	0.000	0.000	0.000	MWD	
2640.00	43.44	3.53	2091.31	1430.11	88.25	1432.83	0.000	0.000	0.000	MWD	
2670.00	43.44	3.53	2113.09	1450.70	89.52	1453.46	0.000	0.000	0.000	MWD	
2700.00	43.44	3.53	2134.88	1471.29	90.79	1474.09	0.000	0.000	0.000	7" @ 2700md	
2730.00	43.44	3.53	2156.66	1491.88	92.06	1494.71	0.000	0.000	0.000	MWD	
2760.00	43.44	3.53	2178.44	1512.47	93.33	1515.34	0.000	0.000	0.000	MWD	
2790.00	43.44	3.53	2200.22	1533.05	94.60	1535.97	0.000	0.000	0.000	MWD	
2820.00	43.44	3.53	2222.01	1553.64	95.87	1556.60	0.000	0.000	0.000	MWD	
2850.00	43.44	3.53	2243.79	1574.23	97.14	1577.23	0.000	0.000	0.000	MWD	
2880.00	43.44	3.53	2265.57	1594.82	98.41	1597.86	0.000	0.000	0.000	MWD	
2910.00	43.44	3.53	2287.36	1615.41	99.68	1618.48	0.000	0.000	0.000	MWD	
2940.00	43.44	3.53	2309.14	1636.00	100.95	1639.11	0.000	0.000	0.000	MWD	
2970.00	43.44	3.53	2330.92	1656.59	102.22	1659.74	0.000	0.000	0.000	MWD	
3000.00	43.44	3.53	2352.70	1677.17	103.49	1680.36	0.000	0.000	0.000	MWD	
3016.93	43.44	3.53	2365.00	1688.79	104.21	1692.01	0.000	0.000	0.000	Objective 1	
3030.00	43.44	3.53	2374.49	1697.76	104.76	1700.99	0.000	0.000	0.000	MWD	
3060.00	43.44	3.53	2396.27	1718.35	106.03	1721.62	0.000	0.000	0.000	MWD	
3090.00	43.44	3.53	2418.05	1738.94	107.30	1742.25	0.000	0.000	0.000	MWD	
3120.00	43.44	3.53	2439.84	1759.53	108.57	1762.87	0.000	0.000	0.000	MWD	
3150.00	43.44	3.53	2461.62	1780.12	109.84	1783.50	0.000	0.000	0.000	MWD	
3180.00	43.44	3.53	2483.40	1800.71	111.11	1804.13	0.000	0.000	0.000	MWD	
3210.00	43.44	3.53	2505.19	1821.29	112.38	1824.76	0.000	0.000	0.000	MWD	
3219.39	43.44	3.53	2512.00	1827.74	112.75	1831.21	0.000	0.000	0.000	TL 3 1/2"	
Targets											
Name	Description	Dir.	TVD m	+N/-S m	+E/-W m	Map Northing m	Map Easting m	Latitude Deg Min Sec		Longitude Deg Min Sec	
Objective 1	Circle (Radius: 25)		2365.00	1688.79	104.21	2097249.03	1688036.63	18	56	42	681 N
	Plan hit target							85	57	27	120 W

Precision Drilling Planning Report

Company: PEMEX EXPLORACION Y PRODUCCION	Date: 11/09/2003	Time: 20:09:56	Page: 4
Field: Camaronero	Co-ordinate(N/E) Reference: Site: Camaronero 101, True North		
Site: Camaronero 101	Vertical (TVD) Reference: SITE 20.0		
Well: Camaronero 101	Section (NS) Reference: Well (0.00N0.00E,3.53Az)		
Wellpath: OH	Plan:	V.3	

Casing Points

MD m	TVD m	Diameter in	Hole Size in	Name
0.00	0.00	13.375	17.500	13 3/8"
300.00	300.00	9.625	12.250	9 5/8"
2700.00	2134.86	7.000	8.500	7" @ 2700md
3219.39	2512.00	3.500	6.000	TL 3 1/2"